




STAINLESS STEEL BOX GANGWAY WITH SPECIAL TROLLEY

1103

sales@opacmare.nl / +31 320 26 17 23



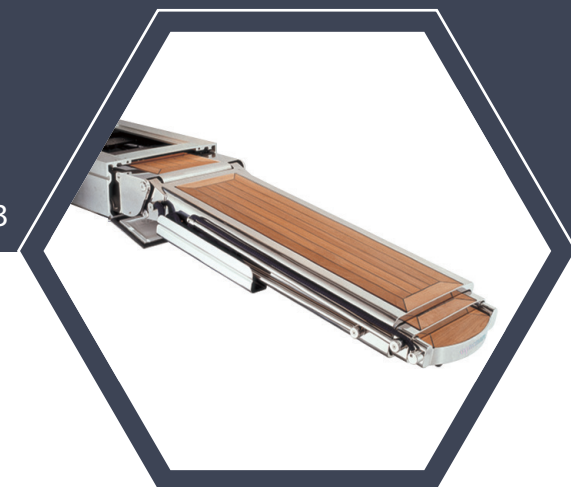


L BOX	G	F Teak	M
510/20"	390/15 ¹¹ / ₃	260/10 ¹¹ / ₄	355/14"
550/21 ² / ₃	430/17"	300/11 ⁴ / ₅	395/15 ¹¹ / ₂
590/23 ¹¹ / ₄	470/18 ¹¹ / ₂	340/13 ² / ₅	435/17"
660/26"	550/21 ² / ₃	410/16 ¹¹ / ₆	515/20 ¹¹ / ₄
710/28"	600/23 ² / ₃	460/18"	555/21 ⁴ / ₅



Removable watertight lower panel H + 20mm / ⁴/₅


A= maximum length of gangway outside of the box
 B= box length
 C= distance between the gangway hinges and the box
 H= box height
 L= box width
 α and β= the total angle the gangway can achieve.

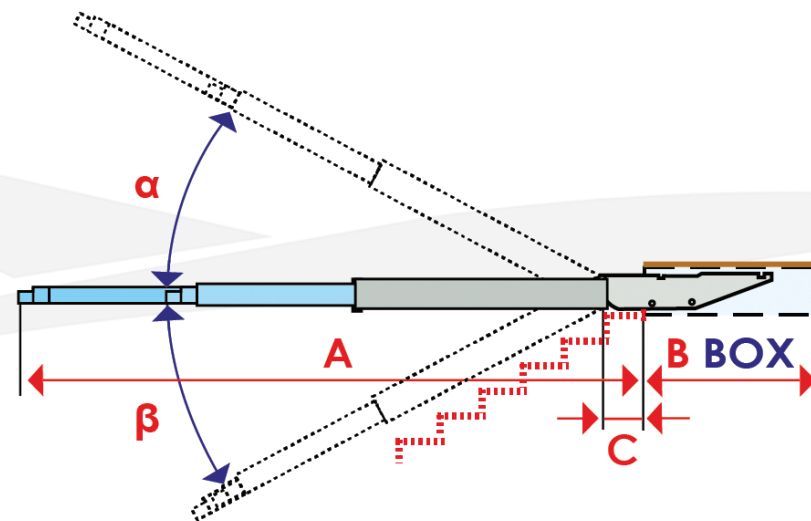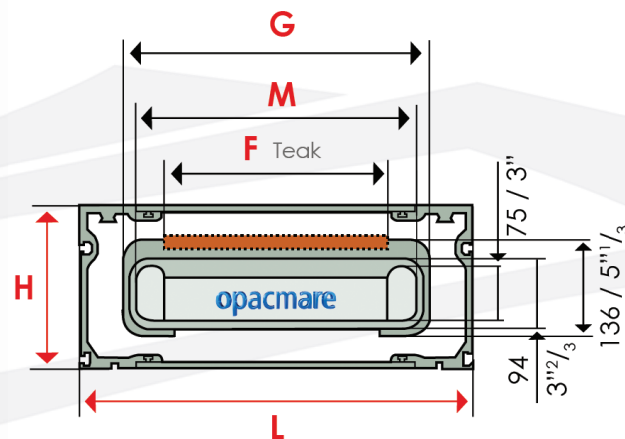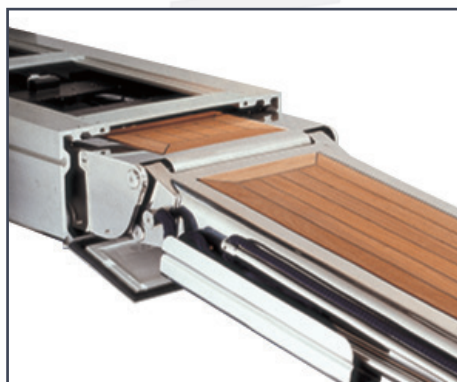

UPDATED ON 07/2018

STAINLESS STEEL BOX GANGWAY WITH SPECIAL TROLLEY

1103

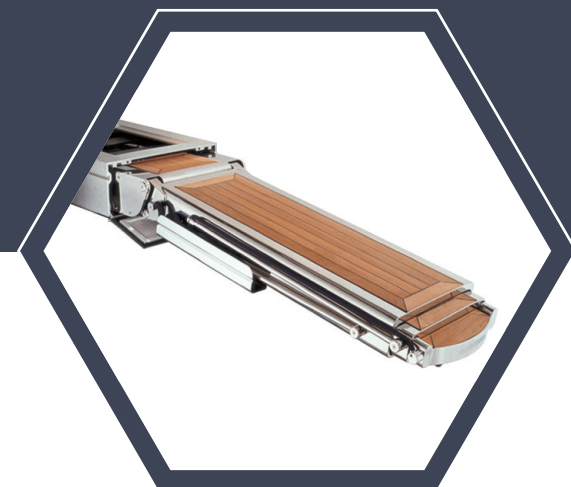

This gangway allows the boarding of 150 Kg / 330 lbs maximum (one person at a time).

The equivalent model in serie **1133**, but box height **195 / 7 ²/₃**.

CUSTOMISATION FOR TENDER LIFTING CAN BE REQUIRED.

● Available with larger box optionals 510/590/660/710 mm. / * Manual stanchions only.

MODEL	A (mm/inch)	B (mm/inch)	C (mm/inch)	H (mm/inch)	L standard (mm/inch)	α	β	Loading capacity optional (mm/inch)	Peso/Weight (Kg/lbs)
1103/21*	2130/84"	1740/69"	200/7 ⁴ / ₅	230/9"	550/21 ² / ₃ ●	15°	15°	150/330	200/440
1103/29	2900/114"	2140/84"	200/7 ⁴ / ₅	230/9"	550/21 ² / ₃ ●	15°	15°	150/330	232/510
1103/35	3460/136"	2340/92"	200/7 ⁴ / ₅	230/9"	550/21 ² / ₃ ●	15°	15°	150/330	275/600
1103/38	3755/147"	2540/100"	200/7 ⁴ / ₅	230/9"	550/21 ² / ₃ ●	15°	15°	-	318/700
1103/40	4035/159"	2660/105"	200/7 ⁴ / ₅	230/9"	550/21 ² / ₃ ●	15°	15°	-	333/735
1103/43	4345/171"	2800/110"	200/7 ⁴ / ₅	230/9"	550/21 ² / ₃ ●	15°	15°	-	353/780
1103/44	4425/175"	2900/114"	300/12"	230/9"	550/21 ² / ₃ ●	15°	15°	-	360/795
1103/45	4540/179"	3000/118"	400/16"	230/9"	550/21 ² / ₃ ●	15°	15°	150/330	371/820
1103/47	4710/186"	3340/131"	600/24"	230/9"	550/21 ² / ₃ ●	15°	15°	-	407/900
1103/50*	5040/199"	3440/136"	500/20"	230/9"	550/21 ² / ₃ ●	15°	15°	-	440/970
1103/54*	5400/213"	4100/161"	1350/53"	230/9 ⁵ / ₆	550/21 ² / ₃ ●	15°	15°	-	497/1095
1103/58*	5800/228"	4100/161"	800/32"	230/9"	550/21 ² / ₃ ●	15°	15°	-	542/1190