

This gangway allows the boarding of 150 Kg / 330 lbs maximum (one person at a time).

IDEAL FOR TENDER LIFTING.

X= maximum length of gangway when extended




Y= minimum length of gangway when retracted

C= rotational range of the base unit

D= height of the built-in part of the unit below deck level

E= height of the rotating base

α and β = the total angle the gangway can achieve.

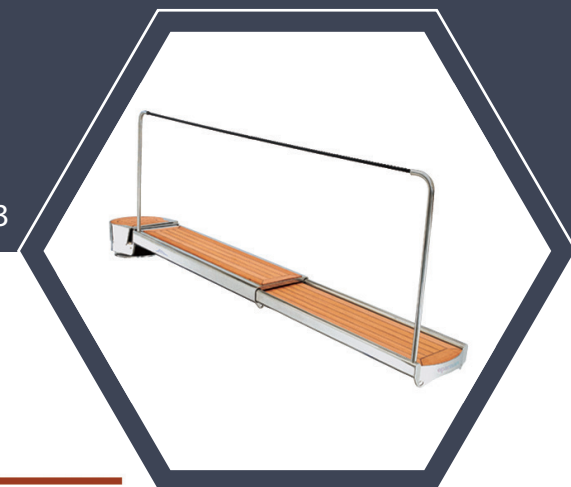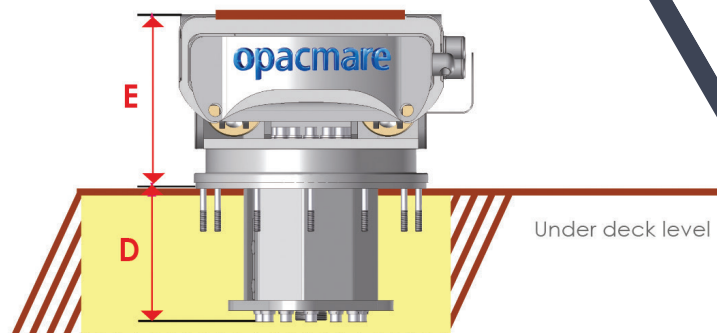

MODEL	X (mm/inch)	Y (mm/inch)	C (mm/inch)	D180° (mm/inch)	E (mm/inch)	α	β	Rotation standard	Rotation optional	Loading capacity standard (Kg/lbs)	Peso/Weight (Kg/lbs)
1848/24	2340/90"	1570/62"	205/8 ¹¹ / ₈	180/7 ¹¹ / ₁₃	225/8 ⁷ / ₈	40°	22°	180°	359°	160/360	171/380
1848/27	2720/107"	1735/68"	205/8 ¹¹ / ₈	180/7 ¹¹ / ₁₃	225/8 ⁷ / ₈	40°	22°	180°	359°	160/360	182/400
1848/30	3010/119"	1980/78"	205/8 ¹¹ / ₈	180/7 ¹¹ / ₁₃	225/8 ⁷ / ₈	40°	22°	180°	359°	160/360	198/440

